



COMPACT SCREW MOTOR COMPRESSORS

ROTAP[®]



SUPERSILENT

VRK RANGE




- Single-section type screw compressor unit of exclusive ROTAIR production.
- 24 month guarantee. Maximum performance and reliability through time.
- START-WORK device for easy starting even at low temperatures.
- Folding towing rudder.



- Skid version upon request.
- Modern and smart design.
- Pull up opening protective casing.

Fuel tank with 15 LT. capacity made of transparent material for immediate level control. Easily removable thanks to a special fold away handle.

Limited fuel consumption thanks to the automatic and progressive acceleration of the engine speed according to the required air. (ECONOMY SYSTEM)

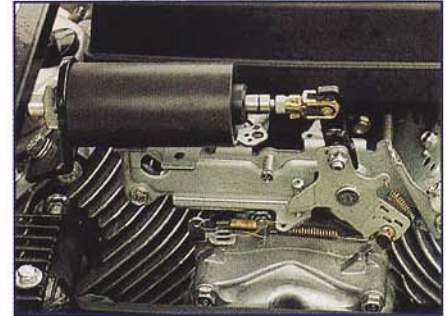

TECHNICAL DATA

MODEL	AIR OUTPUT ISO 1217 lt/min.	OPERATING PRESSURE bar	PETROL ENGINE	NUMBER OF CYLINDERS	REAL POWER Kw/HP	UTILIZATION POWER Kw/HP	RPM MAX	COOLING
VRK 120	1.200 850 750	6 11 13	BRIGGS & STRATTON VANGUARD TWIN	2	11,7/16,0	8,8/12,0	3.050	air
VRK 130 (extra CEE)	1.350	6	BRIGGS & STRATTON VANGUARD TWIN	2	11,7/16,0	11,0/15,0	3.400	air
VRK 160	1.600 1.100 950	6 11 13	HONDA GX 620	2	14,7/20,0	12,1/16,5	3.050	air
VRK 180 (extra CEE)	1.800	6	HONDA GX 620	2	14,7/20,0	14,0/19,0	3.400	air
VRK 200	1.900 1.250 1.100	6 11 13	HONDA GX 670	2	17,7/24,0	14,7/20,0	3.000	air
VRK 220 (extra CEE)	2.150	6	HONDA GX 670	2	17,7/24,0	17,0/23,1	3.450	air

Standard electrical starting on all models - SIZE: length mm.1050 - width mm. 780 - height mm.1000 - WEIGHT: kg. 205

NOISE LEVEL ACCORDING TO ECC STANDARDS NO 84-533 \leq 100 LWA

ROTAIR s.p.a.

Via Bernezzo, 67
12023 CARAGLIO CN Italy

Tel +39-0171-619676
Fax +39-0171-619677
E-mail: info@rotairspa.com
http://www.rotairspa.com